

# N-MC-RE

## MCP Accessory - Intelligent Manual Call Point Resettable Element

### General

---

The N-MC-RE is an flexible trigger element for compatible Type-A manual call points. It allows the manual call point to be reset after activation without the need to replace the element.

### Visual Indication


---

The N-MC-RE uses clear black print on a brilliant white background. An arrow on either side pointing inwards towards a dot indicates to the operator where to push on the element to activate the manual call point.

### Easy to Install

---

Installation of the flexible element in a compatible manual call point is made easy by the product design. Using the test key the front cover of the manual call point is removed, allowing the insertion of the N-MC-RE with a quick and simple action.

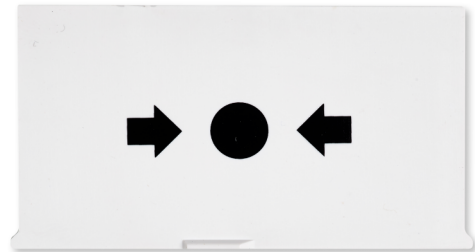

### Details

---

- Quick installation without special tools
- No replacement required after activation
- Regular test procedures encouraged without the added cost of replacements
- EN54 certified with compatible manual call points

# N-MC-RE

## MCP Accessory - Intelligent Manual Call Point Resettable Element

### Technical specifications

---

#### General

|                     |                               |
|---------------------|-------------------------------|
| Interfaz de usuario | Symbol                        |
| Compatibilidad      | ActivSense manual call points |

#### Detección

|            |          |
|------------|----------|
| Monitoring | Presence |
|------------|----------|

#### Físico


|                     |                                  |
|---------------------|----------------------------------|
| Dimensiones físicas | 70.52 x 37 x 6.53 mm (W x H x D) |
| Color               | Blanco                           |
| Material            | Plástico                         |
| Marcado funcional   | →●←                              |

#### Medioambiental

|                               |                           |
|-------------------------------|---------------------------|
| Antivandálico                 | No                        |
| Temperatura de funcionamiento | -30 to +72°C              |
| Temperatura de almacenamiento | -30 to +72°C              |
| Humedad relativa              | 10 to 95% (noncondensing) |
| Entorno                       | Interior, Exterior        |

#### Estándares y regulaciones

|              |                         |
|--------------|-------------------------|
| Cumplimiento | CE, REACH, RoHS 2, WEEE |
| Normativas   | EN54-11                 |

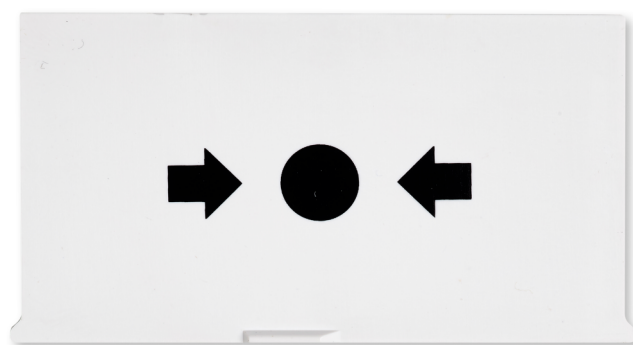

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 6 July 2020 - 16:31

