

DM3000E

2000 Series Compatible Intelligent Addressable Manual Call Point - Weatherproof Red

General

The DM3000 Series is an intelligent 2000 Series range of addressable manual call points. The DM3000E is a red, single action weatherproof MCP with a House-on-Fire functional indicator. It is delivered complete with resettable element, test connector, test key and back box. Multiple optional accessories are available to facilitate most outdoor installation requirements.

Aesthetics

This weatherproof single action MCP is a standard profile, outdoor MCP suitable for surface mount installations using the back box supplied with the product. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view. The clean face of the MCP is further enhanced by a front access & test key facility that allows access to the activation element that can be either frangible or resettable.

Configuration Friendly

Electronic configuration and addressing is possible wirelessly (powered or unpowered)

Installation & Maintenance Friendly

The front facing access for an aesthetically matching, red MCP test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover.

Compatibility

The DM3000 series supports new and legacy Aritech 2000 systems. They can be deployed seamlessly into existing legacy systems without CIE configuration changes.



Details

- Reliable single action manual call point for surface mounting
- Dual, tri-colour status indicators offers 180° alarm visibility
- Tamper resistant design with resettable or frangible element
- Unobtrusive front facing test facility
- Outdoor rated, waterproof enclosure
- Back box with top and bottom cable entry
- Screen connection terminal for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- An alarm flag on the face of the manual call point allows alarm indication even without alarm LEDs
- Fast, no-tools-required maintenance using the test key
- Local system intelligence for full configuration flexibility
- Electronic addressing for 128 addresses
- Unpowered wireless setup, configuration and reporting
- Wireless commission and diagnostics reporting
- Local event, manufacturing and service logs

DM3000E

2000 Series Compatible Intelligent Addressable Manual Call Point - Weatherproof Red

Technical specifications

General

Indicación de estado	Dual LEDs Alarm (Red Constant) Isolated (Yellow Constant) Fault (Yellow Blinking) Communication (Green Blinking)
Interfaz de usuario	LEDs, Alarm Flag
Compatibilidad	Aritech 2000 systems
Registro de eventos	32 Events
Conectividad	Loop protocol & RFID
Addressing method	Electronic

Eléctrico

Tipo de fuente de alimentación	Loop powered
Voltaje de funcionamiento	16 to 42 VDC
Consumo de corriente	200 μ A (Quiescent) 2.9 mA (Alarm)

Detección

Principio de detección	Push button/switch
Monitoring	Device type, Presence

Físico

Dimensiones físicas	108 × 108 × 69 mm
Peso neto	252 g
Color	Rojo (RAL 3028)
Tipo de Montaje	Montaje en pared
Entradas de cable	3
Especificaciones del cable	0.404 to 2.05 mm
No. de núcleos de cable	2
Terminales	4 (A+/A-;B+/B-)
Marcado funcional	House on Fire

Medioambiental

Antivandálico	No
Temperatura de funcionamiento	-25 to +72°C
Temperatura de almacenamiento	-25 to +72°C
Humedad relativa	10 to 95% noncondensing
Entorno	Interior / Exterior
Clasificación IP	IP67

Estándares y regulaciones


Cumplimiento	CE, REACH, RoHS 2, WEEE
Certificación	EN54-11
Normativas	CPR Certified

Standards & Regulation

Voluntary marks	A+
-----------------	----

Physical

Backbox cable entry	1 × threaded MK20 (Top or bottom)
	2 × threaded MK20 (Bottom or top)

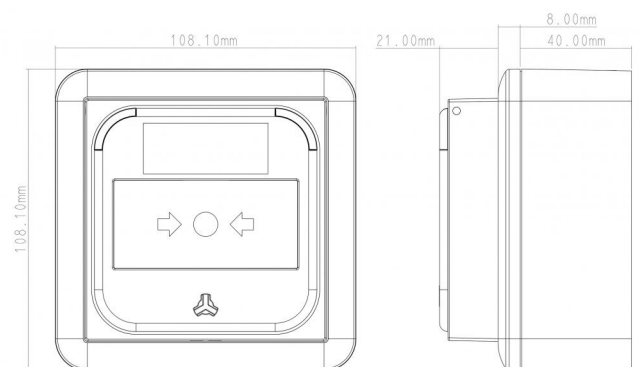

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 2 July 2020 - 12:34

